


DC-4G, 1W, N Female to N Male, 3~30dB Attenuator

Specifications :

Part No.	HT-ATT-4G-XX-1W-NFNM					
Electricals						
Operating Frequency	DC-4000MHZ					
Impedance (Ohm)	50					
VSWR	≤1.25@ DC-4000 MHz					
PIM(dBc)	≤-130dBc@2*20dBm					
Application	Indoor & Outdoor					
Degree of Protection	IP65					
Handling Power (Watt)	1W					
Interface	N Female (input) to N Male (output)					
Operating Temperature (°C)	-40 ~ + 80					
Attenuation (dB)	3	5	6	10	15	20
Attenuation Tolerance (dB)	±0.4	±0.4	±0.5	±0.7	±0.8	±0.8
Mechanicals						
Dimension (mm)	58×Φ21(includes connectors)					
Net Weight (g)	70					
Color	silver					

Outline drawing :

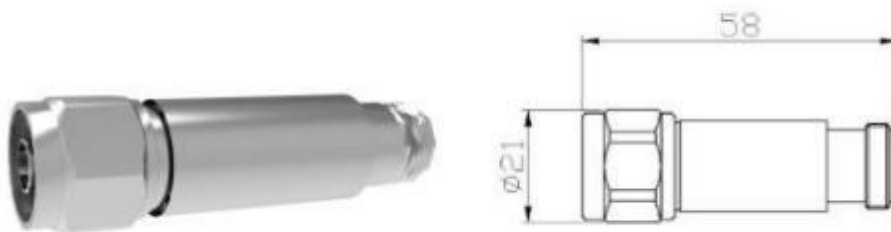

nput