

5G MIMO Omnidirectional Ceiling Antenna

- Hutsin 5G wide band ceiling antenna 617~6000mhz,gain 3/5 dBi used in 2G/3G/4G/5G system.
- Hutsin 4X4 Mimo omni directional 5g antenna,4*4.3-10 Female or 4*N-Female connectors.




Specifications :

Part No.	6508800301			
Frequency range (MHz)	617-960	1710-2700	3300-3800	4900-6000
Polarization	Linear * 4			
Gain(dBi)	4	5	6	6
Horizontal beam width (°)	360			
Vertical beam width (°)	80	50	40	50
Non-circularity (dB)	/			
Isolation (dB)	≥16	≥20	≥25	
Impedance (Ω)	50			
VSWR	≤2.0	≤1.8		
Intermodulation-IM3 (2×43dBm carrier)	≤-150dBc			
Maximum power (W)	50			
Lighting protection	DC Ground			
Connector	4*4.3-10 Female or 4* N-Female			
Connector position	Bottom			
Exposed cable size	30cm (or customer requirement)			
Height/width/depth	φ350*45 mm			
Weight	1.3 kg			
Radome material	ABS			
Radome color	White			
Operating temperature	-40~60 °C			
Application	Indoor			
Mounting	Nut			

Product Information:

Address: 209-211, Building 1, Dayuan Industrial Zone, Houting Community, Shajing Street, Baoan District, Shenzhen
 Mobile :+86 19826551792 Email : cherry@hutsin.com


617 ~ 960MHz typical pattern: 1710 ~ 2700MHz typical pattern: 3300 ~ 3800MHz typical pattern:

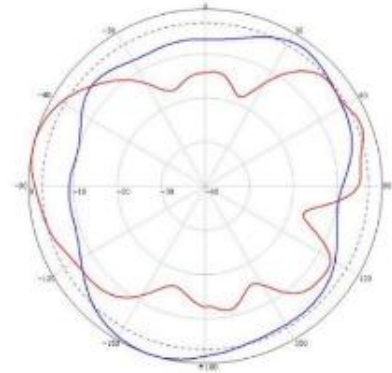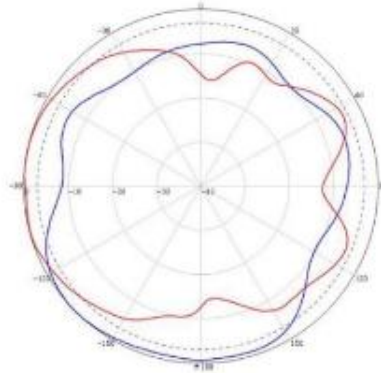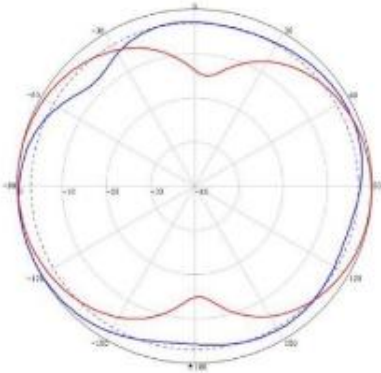


Product Pictures



Product Size

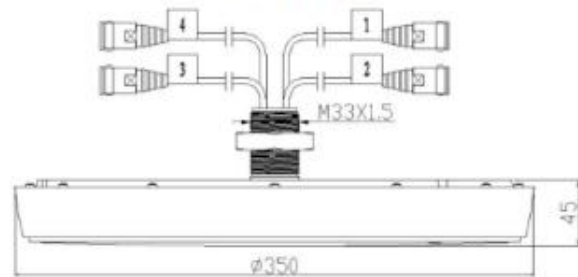

Installation Sketch

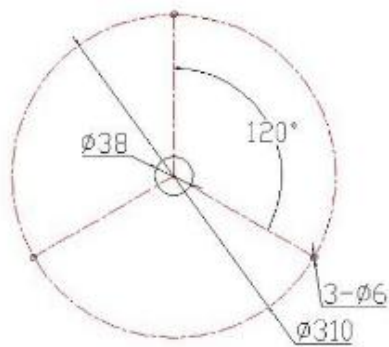

Optional screw fixing hole size

